


# **PB-RD-VDEX KIT**

### **PB-RD-VDEX**

### PAVEMENT BREAKER AND ROCK DRILL ATTACHMENT

- PB-RD-VDEX fits all pneumatic, electric and hand held hydraulic Pavement Breakers, regardless of class and shank size.
- The PB-RD-VDEX also fits all Rock Drills.
- Our patented Friction Mag design attaches to the chisel rather than the tool.
- The patented Friction Mag device allows the PB-RD-VDEX to be used on Rock Drill applications.

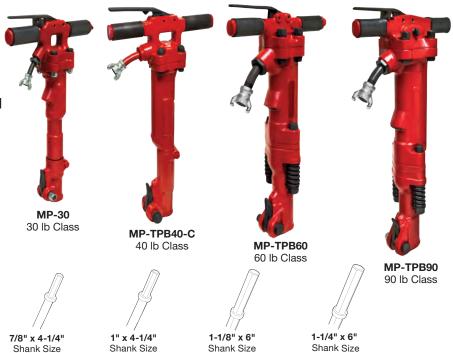

NOTE: For job sites requiring water dust suppression use the VDEX WATER PLUG, see page 11 for more accessories.

### PB-RD-VDEX COMPONENTS

**Get OSHA Compliant / Universal Kits** 

### **YOUR UNIVERSAL SOLUTION!**

- FITS PNEUMATIC, ELECTRIC AND HAND HELD PAVEMENT BREAKERS.
- FITS ALL ROCK DRILLS, TOO.
- ONE SIZE FITS ALL!

PB-RD-VDEX Kit Consists of:			
Part No.		Description	
1.	2199-PB-RD-VDEX	Snorkel Attachment	
2.	2198-VDEX	Bellow O.A.L. 8"	
3.	HS16	1-1/4" Hose Clamp	
4.	HS24	1-1/2" Hose Clamp	

Accessories (Not Included in Kit)		
5.	VV-0021	Bellow Extension
6.	VDEX-NZL-4IN	Bristle Foot Extension




# **PB-RD-VDEX KIT**



### **PB-RD-VDEX**

#### PAVEMENT BREAKER AND ROCK DRILL ATTACHMENT

- PB-RD-VDEX fits all pneumatic, electric and hand held hydraulic Rock Drills.
- Our patented Friction Mag design attaches to the chisel rather than the tool.
- The Friction Mag device rotates when used with Rock Drills.
- The Friction Mag device allows the PB-RD-VDEX to be easily installed over the shank and collar end of all Rock Drill Steel.
- When using Rock Drill Steel and bits over 1-7/8" diameter it is recommended that you use the VDEX-NZL-4IN bristle foot.

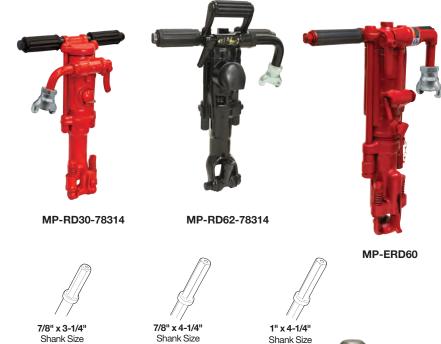

NOTE: For job sites requiring water dust suppression use the VDEX WATER PLUG, see page 11 for more accessories.

## PB-RD-VDEX COMPONENTS

**Get OSHA Compliant / Universal Kits** 

### **YOUR UNIVERSAL SOLUTION!**

- FITS PNEUMATIC, ELECTRIC AND HAND HELD ROCK DRILLS.
- FITS ALL PAVEMENT BREAKERS, TOO.
- ONE SIZE FITS ALL!

PI	PB-RD-VDEX Kit Consists of:		
Pa	rt No.	Description	
1.	2199-PB-RD-VDEX	Snorkel Attachment	
2.	2198-VDEX	Bellow O.A.L. 8"	
3.	HS16	1-1/4" Hose Clamp	
4.	HS24	1-1/2" Hose Clamp	


Ac	Accessories (Not Included in Kit)		
5.	VV-0021	Bellow Extension	
6.	VDEX-NZL-4IN	Bristle Foot Extension	



# MICHIGAN PNEUMATIC TOOL ENGINEERING BULLETIN

#### Effective 03-01-2018

In an effort to bring you the best easy-to-use products we have taken the liberty of connecting the Coupler (#2105-VDEX) onto your VDEX Snorkel attachment (#2199-VDEX) with the O-Ring (#OR-6X38). There should be no need to dismantle this sub-assembly, but should you need to, you can replace the O-Ring with a Retainer Spring (#1194-2).

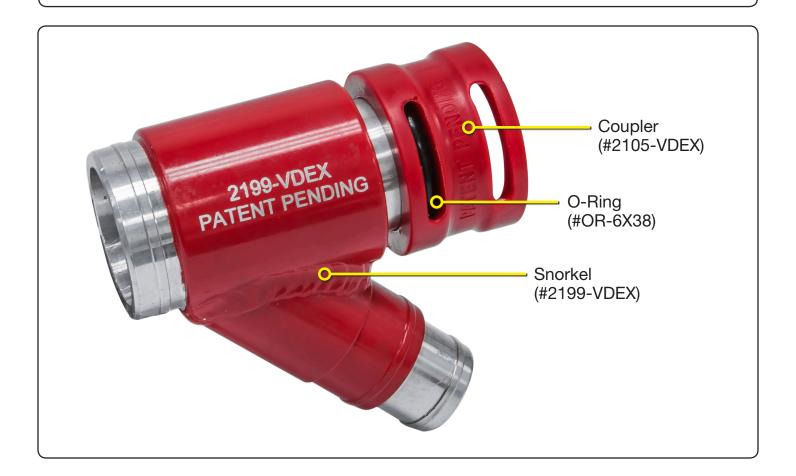



KEEP CHISEL AGAINST THE WORK SURFACE WHEN OPERATING TOOL.

FAILURE TO DO SO WILL CAUSE EXCESSIVE WEAR AND DAMAGE.

OPERATOR MUST AVOID DEAD BLOWS IN ORDER TO KEEP THE TOOL UP AND RUNNING.

#### **NO DEAD BLOWS**



#2199-VDEX
Snorkel Intact & Operational

#### **DEAD BLOWS**



#2199-VDEX
Snorkel Damaged